

SERIES: PRISMATIC ULTRACAPACITOR

FEATURES

- Made in the USA
- High energy density
- High power density
- Low internal resistance (ESR)
- 10 year life
- High cycle life (+500K cycles)
- RoHS compliant

APPLICATIONS

- Utility energy storage
- Peak shaving
- Load leveling
- EV launch assist
- EV regeneration
- Mass transit (Bus / Rail)




SPECIFICATIONS:

Operating Temperature Range	-40 °C to +70 °C	
Storage Temperature Range	-40 °C to +70 °C	
Rated Voltage, V_R	2.7 V DC	
Capacitance Tolerance	-5% to +20%	
Cycle Life (25°, V_R)	After 500,000 cycles between rated voltage and half rated voltage under constant current at 25 °C	
	ΔC < 30% decrease, ESR < 200% increase	
Life Time*	After 10 years at rated voltage and 25 °C	
	ΔC < 30% decrease, ESR < 200% increase	
Endurance	After 1000 hours application of rated voltage at 65 °C	
	Capacitance Change	Within 20% of initial specified value
	Internal Resistance (ESR)	Within 100% of initial specified value
Shelf Life	After 1000 hours storage at 70 °C without load (0 V DC)	
	Capacitance Change	Within 20% of initial value
	Internal Resistance (ESR)	Within 100% of initial value

*Life time is a provisional value

DIMENSIONS:

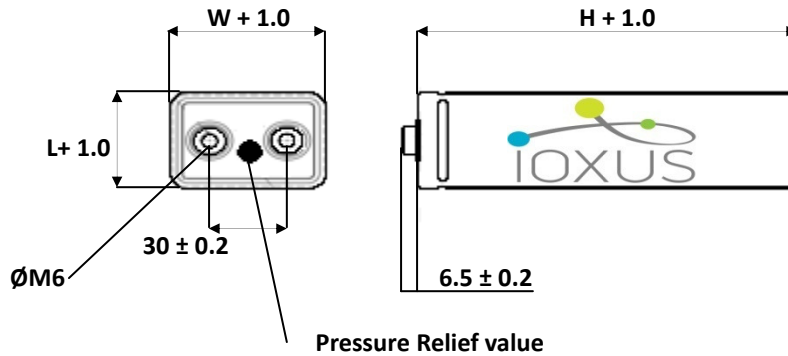

Part Number	Unit	RSC2R7308SP
Length (L)	mm	51
Height (H)	mm	150
Width (W)	mm	64
Volume	ml	490
Weight	g	550

PRODUCT DETAILS:

Part Number	Unit	RSC2R7308SP
Capacitance	F	3000
Capacitance Tolerance	%	-5 to +20
Rated Voltage	V	2.7
Surge Voltage	V	2.85
Impedance (AC 1kHz)	mΩ	≤ 0.30
ESR (DC)	mΩ	≤ 0.36
Max Stored Energy	Wh	3.038
Specific Energy	Wh/kg	5.52
	Wh/L	6.20
Maximum Power	kW/kg	11.05
Operating Temp	°C	-40 to +65
Stored Temp	°C	-40 to +70
Max Leakage Current	mA	5.0 (72h)
Life time	years	10
Cycle life	cycles	500,000

**All specifications subject to change without notification; please contact ioxus for the latest information